




## 8 Kanal Hutschienen Relaismodul für Raspberry Pi

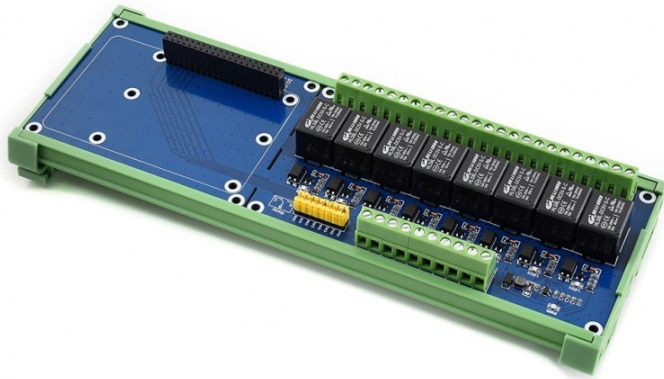

|                  |            |
|------------------|------------|
| Artikel-Nr.:     | RPI-8DRELM |
| Hersteller:      | Waveshare  |
| Herkunftsland:   | China      |
| Zolltarifnummer: | 85364900   |
| Gewicht:         | 0.019 kg   |

The RPi Relay Board (B) is an expansion board with 8-ch relays for Raspberry Pi. It gives your Pi the ability to control high voltage products such as home appliances.

### Eigenschaften

- Supports Raspberry Pi A+/B+/2B/3B/3B+
- High quality relays, loads up to 5A 250V AC or 5A 30V DC
- Photo coupling isolation, prevent interference from high voltage circuit
- Standard rail mount bottom case
- Onboard LEDs for indicating relays status
- Relay control pin selection jumper, allows to control the relays by custom pins other than the default pins
- Reserved control Interface, allows to work with controllers like PLC
- Comes with development resources, including examples in wiringPi, bcm2835, python, python-bottle (webpage control), and crontab (cron job)

### Spezifikationen

- Power supply voltage: 5V
- Trigger signal: 3.3V/5V
- Relay channels: 8-ch
- Contact form: SPDT-NO,NC
- Closed current: 6mA (per channel)
- Connector: screw terminal block
- Dimension: 232 × 72 (mm)
- Mounting hole size: 3.0mm

### Lieferumfang

- Relay Board × 1
- Rail mount bottom case x1



- Screws pack x 1

## Dokumentation / Downloads

- [http://www.waveshare.com/wiki/RPi\\_Relay\\_Board\\_\(B\)](http://www.waveshare.com/wiki/RPi_Relay_Board_(B))

## Weitere Bilder:

